


LED FLOODLIGHT



MFL 2 SERIES



Key Features

- Triac dimming compatible
- Designed with reliable AC driver on board to enhance the service life
- Rapid heat-dispersing design to prolong lamp life and increases lumen output
- Compact and lightweight design
- Long service life of >50,000 hours L70 @ 50°C
- Safety, EMC and IEC compliance

Application

Decks, Marinas, Docks, Ports, Warehouses

Material


Marine grade aluminium alloy with powder coating, comes with 4mm tempered glass front cover

Options

100V ~ 120V AC



Weight

3.5Kg



Height	AVR E	Diameter
1.00m	992.92lx	324.14cm
2.00m	248.23lx	648.27cm
3.00m	110.32lx	972.41cm
4.00m	62.06lx	1296.54cm
5.00m	39.72lx	1620.68cm

Angle: 116.6°

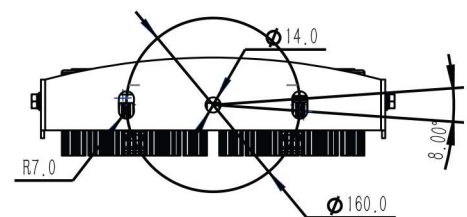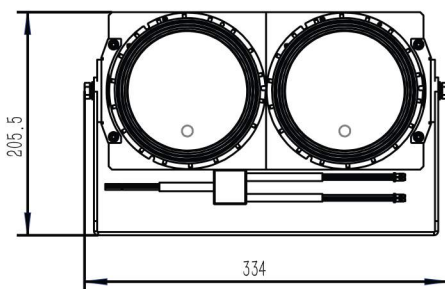

TECHNICAL SPECIFICATIONS

IP 66

Ideal Replacement:



Type	Main Voltage	Power	CCT	Beam Angle	Ambient Temp	System Lumen
MFLB25C0A4	220V ~ 240V AC	112W	5,000K	120°	-20 ~ 50°C	10,400lm

Also available in other CCT and beam angle upon request.

