


LED FLOODLIGHT



MFL 3 SERIES

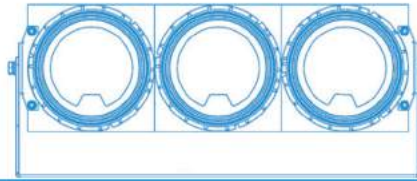

Key Features

- Triac dimming compatible
- Designed with reliable AC driver on board to enhance the service life
- Rapid heat-dispersing design to prolong lamp life and increases lumen output
- Compact and lightweight design
- Long service life of >50,000 hours L70 @ 50°C
- Safety, EMC and IEC compliance

Application

Decks, Marinas, Docks, Ports, Warehouses

Material


Marine grade aluminium alloy with powder coating, comes with 4mm tempered glass front cover

Options

100V ~ 120V AC




Weight

5.7Kg



Height	AVR E	Diameter
1.00m	1505.52lx	321.24cm
2.00m	376.38lx	642.48cm
3.00m	167.28lx	963.73cm
4.00m	94.10lx	1284.97cm
5.00m	60.23lx	1606.22cm

Angle: 116.2°

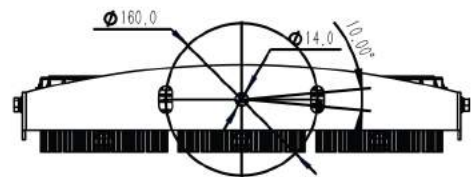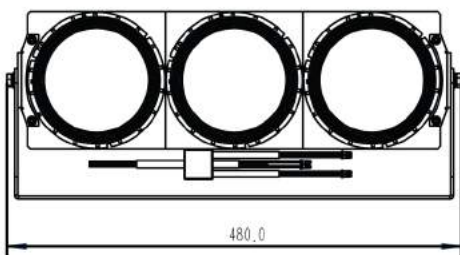

TECHNICAL SPECIFICATIONS

IP 66

Ideal Replacement:



Type	Main Voltage	Power	CCT	Beam Angle	Ambient Temp	System Lumen
MFLB35C0A4	220V ~ 240V AC	168W	5,000K	120°	-20 ~ 50°C	15,600lm

Also available in other CCT and beam angle upon request.

