


# LED FLOODLIGHT



## MFL 6 SERIES



### Application

Decks, Marinas, Docks, Ports, Warehouses

### Material


Marine grade aluminium alloy with powder coating, comes with 4mm tempered glass front cover

### Weight

10.14Kg



### Key Features

- Triac dimming compatible
- Designed with reliable AC driver on board to enhance the service life
- Rapid heat-dispersing design to prolong lamp life and increases lumen output
- Compact and lightweight design
- Long service life of >50,000 hours L70 @ 50°C
- Safety, EMC and IEC compliance



Height	AVR E	Diameter
1.00m	3001.64lx	314.69cm
2.00m	750.41lx	635.42cm
3.00m	333.51lx	956.34cm
4.00m	187.60lx	1277.26cm
5.00m	120.07lx	1598.18cm

Angle: 115.1°

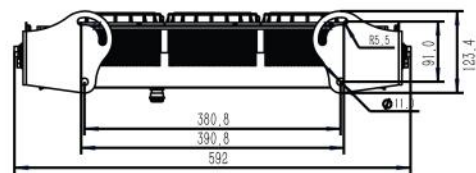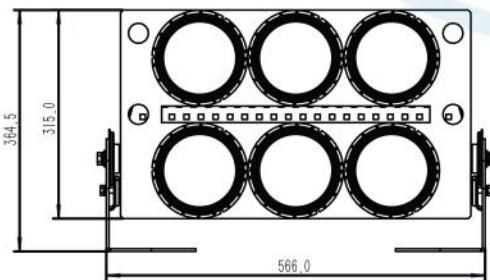

## TECHNICAL SPECIFICATIONS IP 66

Ideal Replacement:



Type	Main Voltage	Power	CCT	Beam Angle	Ambient Temp	System Lumen
MFLB65C0A4	220V ~ 240V AC	336W	5,000K	120°	-20 ~ 50°C	31,200lm

Also available in other CCT and beam angle upon request.

