

**SURFACE MOUNTED CEILING LUMINAIRE FOR PASSAGE WAYS,
CABINS, ACCOMODATION AND PUBLIC AREAS**



DA16F



SURFACE MOUNTED CEILING LUMINAIRE FOR
PASSAGE WAYS, CABINS, ACCOMODATION
AND PUBLIC AREAS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes Ø 5.8 mm
Cable entry	4 inlets for cables max. Ø 11 mm
Protection class	IP43
Voltage	220-240 V AC
Frequency	50-60 Hz

LED SOLUTION

DA16FS	5112007100-xxx
DA16FL	5112007200-xxx
Light source	Linear LP LED modules
Wattage	Max. 20 W / max. 40 W
CCT (color)	3,000 K or 4,000 K
CRI	≥ 80
Luminous flux	DA16FS: 1,500 lm DA16FL: 3,100 lm
Weight	3.0 kg (DA16FS) 4.5 kg (DA16FL)

FLUORESCENT SOLUTION

DA16F 2x 18 W	5112003000-007
DA16F 2x 36 W	5112003100-009
Light source	T8 fluorescent tubes (not included)
Wattage	2x 18 W 2x 36 W
Lamp base	G13
Weight	2.6 kg (2x 18 W) 4.2 kg (2x 36 W)


SPARE PARTS

PART NO.

Cover (DA16FS)	7112000600
Cover (DA16FL)	7112000700

EXTRAS

- > 120 V AC execution
- > 24 V DC execution
- > Dimmable
- > Different color temperatures
- > T5 execution

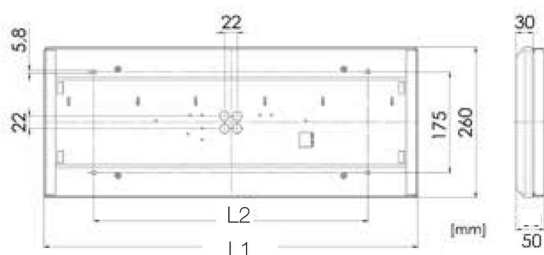

TYPE	L1	L2
DA16FS	648	475
DA16FL	1260	950