



**RECESSED MOUNTED CEILING LUMINAIRE FOR PASSAGE WAYS,  
LOUNGES, DINING ROOMS AND ACCOMMODATION AREAS**

# DE29S

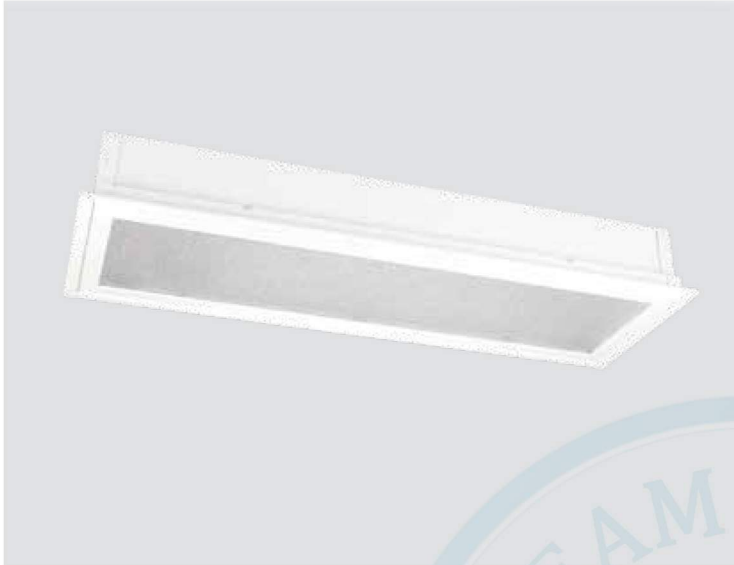

RECESSED MOUNTED CEILING LUMINAIRE  
FOR PASSAGE WAYS, LOUNGES, DINING ROOMS  
AND ACCOMMODATION AREAS

<b>Design</b>	According to rules of maritime classification societies and relevant standards
<b>Housing</b>	Galvanized steel, powder coated white (RAL9010)
<b>Diffuser</b>	Clear polycarbonate with ice crystal structure
<b>Mounting</b>	Mounting set for ceilings, 23-55 mm
<b>Cable entry</b>	2 inlets for cables max. Ø 13 mm
<b>Protection class</b>	IP20 / IP44 in conjunction with ceiling
<b>Voltage</b>	220-240 V AC
<b>Frequency</b>	50-60 Hz

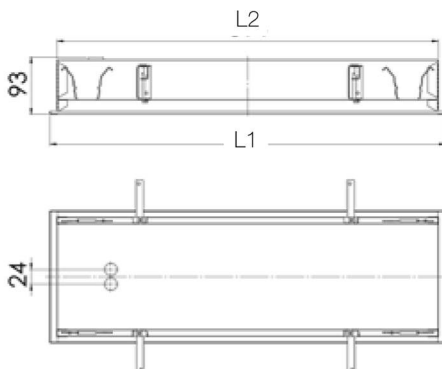

**LED SOLUTION**

DE29SS	5111009200-xxx
DE29SL	5111009300-xxx
Light source	Linear LP LED modules
Wattage	Max. 20 W / max. 40 W
CCT (color)	3.000 K or 4.000 K
Luminous flux	DE29SS: 1,500 lm DE29SL: 3,100 lm
CRI	≥ 80
Weight	3.3 kg (DE29SS) 5.5 kg (DE29SL)

**FLUORESCENT SOLUTION**

DE29S 2x 18 W	5111005600-015
DE29S 2x 36 W	5111005000-017
Light source	T8 fluorescent tubes (not included)
Wattage	2x 18 W 2x 36 W
Lamp base	G13
Weight	3.3 kg (DE29S 2x 18 W) 5.5 kg (DE29S 2x 36 W)

**SPARE PARTS**

	PART NO.
Icecrystal cover (DE29SS)	7112026800
Icecrystal cover (DE29SL)	7112021800

**EXTRAS**

- > 120 V AC execution
- > 24 V DC execution
- > B0-execution
- > Different cable entries

TYPE	L1	L2	X
DE29SS	636	614	625
DE29SL	1246	1225	1235

