


Explosion Proof Tubular Fluorescent Fitting CFY20-2

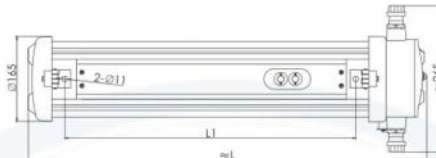

Quick Details

Item Type:	Explosion-proof Lights	Light Source:	Fluorescent
Input Voltage(V):	220V/110V	Lamp Power(W):	20
CRI (Ra>):	65	Working Temperat...:	-20 - 55
Working Lifetime(H...):	6000	IP Rating:	IP56
Certification:	BV, CE	Lamp Body Material:	Stainless Steel
Base Type:	G13	Place of Origin:	China (Mainland)
Ex mark:	Exd II CT6	Model Number:	CFY20-2

Application:

Applied to illumination for ship, oil exploit platform, chemical and explosive gas atmospheres zone 1, zone 2, flammable gases, vapors lever II A, II B, II C level, temperature class T1~T6 dangerous places.

Products feature:

1. The shell adopts high quality cast brass, the light body adopts seal structure, has good waterproof performance and anti-corrosion performance.
2. Adopt rubular fluorescent light source, mounting type is hanging, it is convenient to replace the fluorescent tube.
3. Cable outside diameter is Ø11~Ø12mm.

Type	CFY20-2/1	CFY30-2/1	CFY40-2/1
L (mm)	776	1082	1385
L1 (mm)	561	867	1170
Explosion-proof mark	Exd II CT6Gb		
Voltage	220V/50Hz 220V/60Hz 110V/60Hz		
Power	20Wx2/1	30Wx2/1	40Wx2/1
Lamp holder	G13		
Protection class	IP56		