

## Marine Watertight Fluorescent Ceiling Light with Globe & Guard ZYC23/43



### Scope of Application:

Applicable for illumination of water-dropping, water-spattering, or water-coagulating places on ships, such as the engine rooms, dry cabins, tunnels, pipeline routeway and weather decks, etc

### Housing:


Formed by deep-drawn carbon-steel, or galvanized steel

### Lamp Shade:

Polycarbonate injection, with water-tight sealing structure

### Wiring:


complete inside pre-wiring, equipped with a junction box for convenient connection to power supply.


To prevent possible electric shock, a copper earthing-terminal marked with  is installed outside the fixtures


### Ballast:

Equipped with a set of heavy duty magnetic ballasts, and a compensating capacitor for reliable operation and rapid-start  
The electronic ballasts are also available

### Emergency Lamp:

The light fittings with a  mark on the surface of PC shade are equipped with a B15d lamp holder for emergency bulbs of 24V 10W/15W. The emergency bulbs should be ordered separately

The light fittings with a  mark on the surface of PC shade are equipped with a battery, an automatic charger, and an emergency bulb of 24V 15W, this emergency bulb will automatically work for not less than 180 minutes in case of power blackout

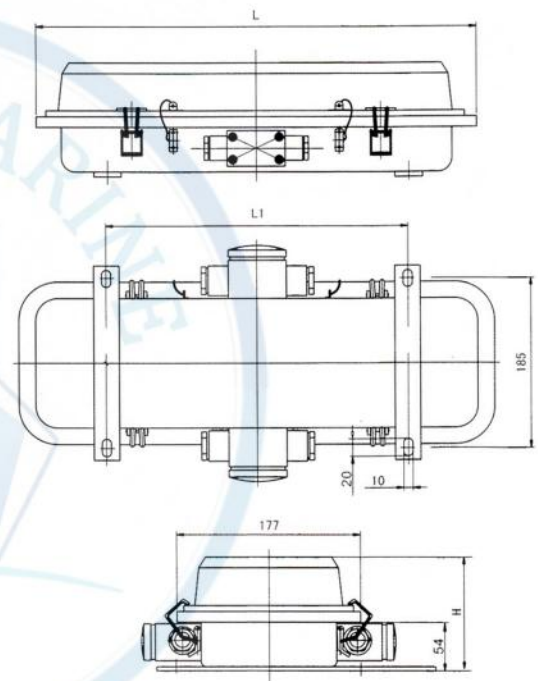

Model	Volt	Capacity	Emergency Lamp &holder	Dimension (mm)			Protection class	Weight (Kg)	DM CODE
				L	L1	H			
ZYC23-1EF	110V	1X20W	B15d 24V 10/15W	690	480	148	IP56	6.7	DM-ZCY2311EF
	220V			690	480	148		6.7	DM-ZCY2312EF
ZYC23-2EF	110V	2X20W		690	480	148		6.9	DM-ZCY2321EF
	220V			690	480	148		6.9	DM-ZCY2322EF
ZYC43-1EF	110V	1X40W		1294	700	148		12.0	DM-ZCY4311EF
	220V			1294	700	148		12.0	DM-ZCY4312EF
ZYC43-2EF	110V	2X40W		1294	700	148		12.3	DM-ZCY4321EF
	220V			1294	700	148		12.3	DM-ZCY4322EF

Note: DM CODE+5 for 50HZ & DM CODE+6 for 60HZ