
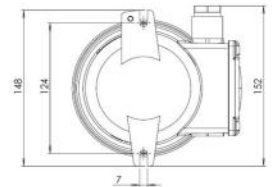



**Ex Light fitting with protection guard brass
max. 60W 230V E27, IP66/67**

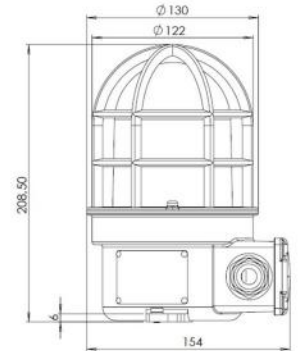

Remarks:

Light fittings with protection guard,
brass, 525, up to T6, max. 60W, IP66/IP67
Ignition protection: de
Explosion protection:
II 2G Ex db eb IIB+H2 T6/T5/T4 Gb
II 2G Ex db eb op is IIB+H2 T6 Gb (with LED)
II 2D Ex tb IIIC T85°C/T100°C/T135°C Db
II 2D Ex tb op is IIIC T85°C Db (with LED)

Zone: 1
Certificate: EPS 17 ATEX 1 120 X
IECEX EPS 17.0060X
Lampholder: E27
Lamp: incandescent lamp up to 60W;
fluorescent lamp up to 15W;
LED lamp OSRAM LED SUPERSTAR CLASSIC A 60 DIM 9W/827
E27
(not included in delivery)
1 cable gland Ex-KVM24x1,5-Z14 -O

WISKA-Order no.	10109148	Number of lampholder	1 ST
Type	Ex-525/1x24-Z14	Lamp	Incandescent lamp, LED, Fluorescent lamp
Material	Brass	Lamp	not included
Globe colour	Clear	Type of cable gland	M24x1,5 Z 14 / 12-14,5mm
Material guard	Brass	Material cable gland	Brass
Voltage	230 V	Using for cable gland	
Voltage max. (V)	250 V	Type of cable	armoured
Type of Voltage	AC	Ø cable diameter min	12 mm
Frequency	50/60 Hz	Ø cable diameter max	14,5 mm
Protection class	IP66 / IP67	Mounting	Upside, Upside down
Operational areas	Explosion protection	Approval	IECEX EPS 17.0060X, EPS 17 ATEX 1 120 X
Temp. range min	-40 °C	Zone	1, 21
Temp. range max	55 °C	Weight	3,47 kg
Lampholder	E27		